
Dual Function Hot & Cold Folding Kitchen Faucet

INSTALLATION INSTRUCTIONS


W-52(ES)

1

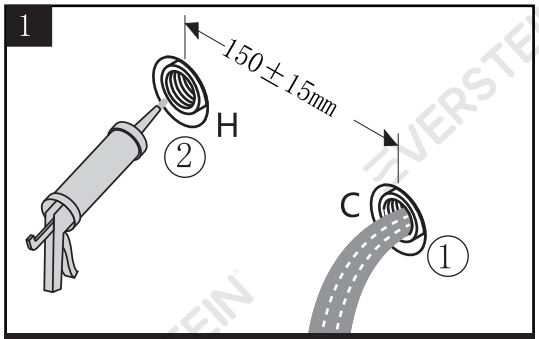


Turn on the water and flush the water pipe for 3 minutes before installation, Rinse out the sand and gravel in the water pipe. First seal the gap between the G1/2 water outlet and the wall with silicone sealant, the center distance of the 2 water outlets must be between 150±15mm.

2

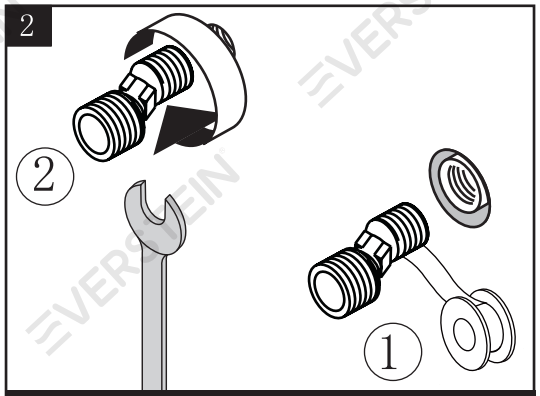


First wrap the Teflon tape on the thread of the swivel elbow, Then use a wrench to screw the two swivel elbow into the hot and cold water outlet.

3

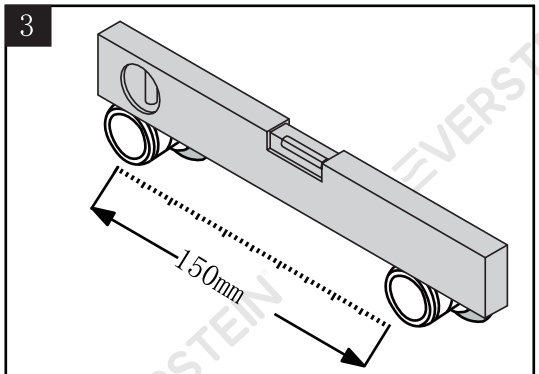


Adjust the swivel elbows that the center distance of the two swivel elbows is 150mm, confirm the two swivel elbows are at the same level.

4

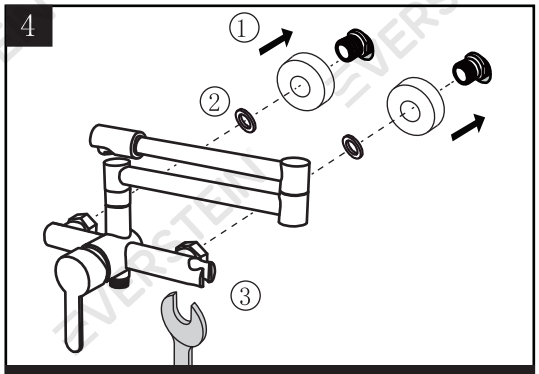


As shown in picture, install the decorative cover on the swivel elbow first, and then fix the faucet with a wrench.
Note: Don't forget step 2 put the washer, avoid sand clogging the faucet.

5

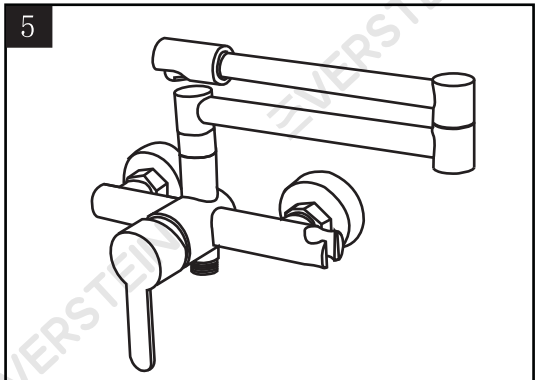


After the faucet is partially install as shown in picture, push it back to wall when no in use, saving your kitchen space.

6

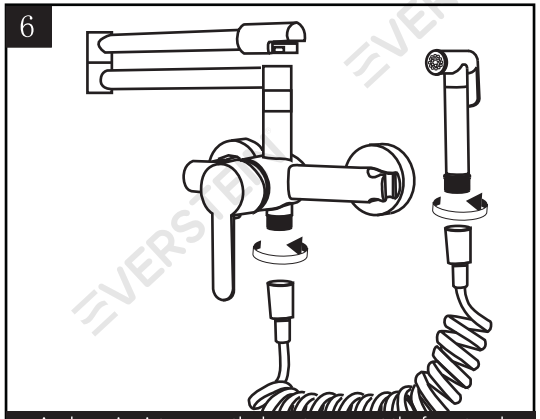


As shown in picture, use the hose to connect the faucet and sprayer.

7

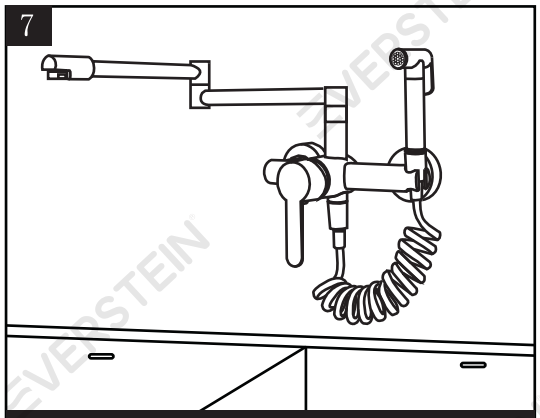


Installation finish ! Easy to pull out when using!

Dimensions / mm

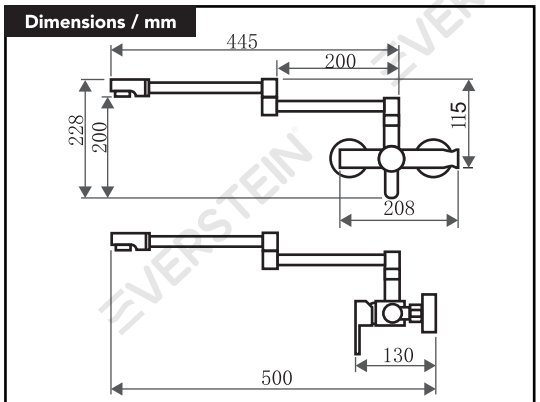


ccording the measuring tool and method different, the size will with slight error, please refer the real prodcut!

360°rotation folding design

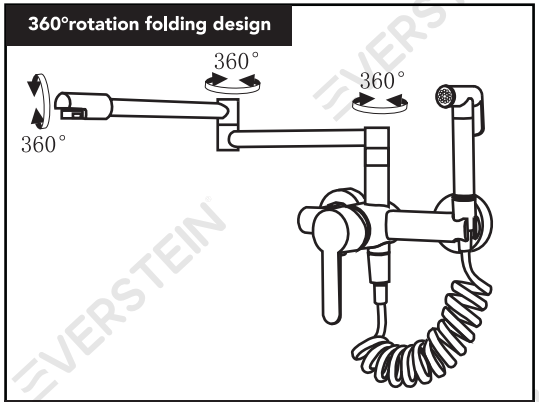


The 360 degree rotation folding design create maximum convenience, save more space.


Adopt advanced automatic switching water valve,realize humanized design

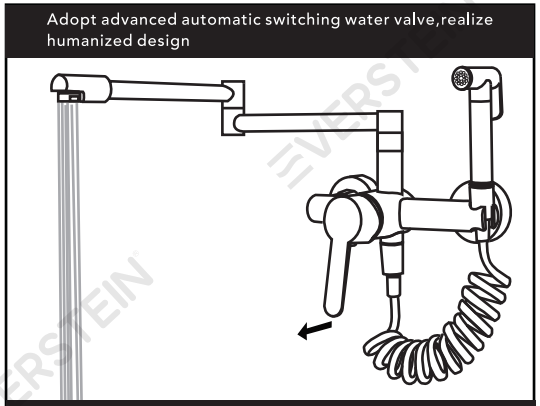

1.First turn on the main handle, water will come out from the spout.

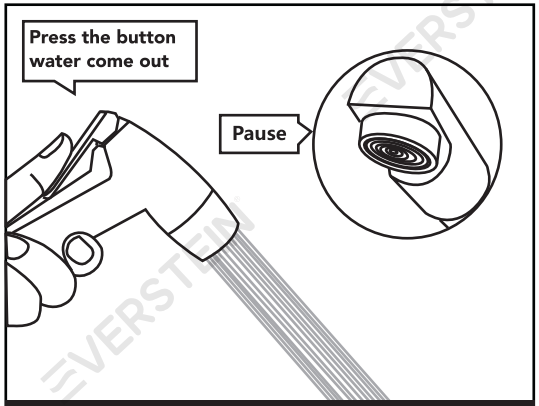

2.Press the sprayer button, the main spout water will switching to sprayer.

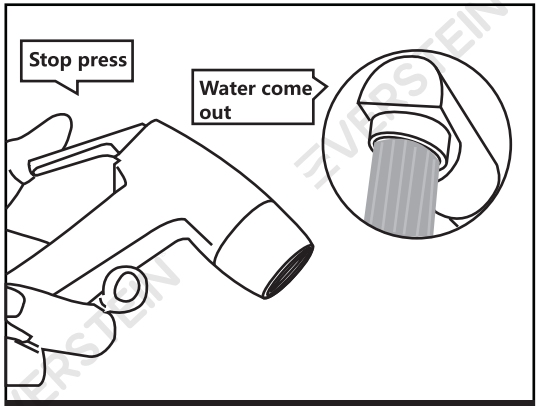


3.Stop press the sprayer button, the main spout water will recovery.

Grifo De Cocina Plegable De Función Dual Caliente Y Fría

Instrucciones De Instalación


W-52(ES)

1

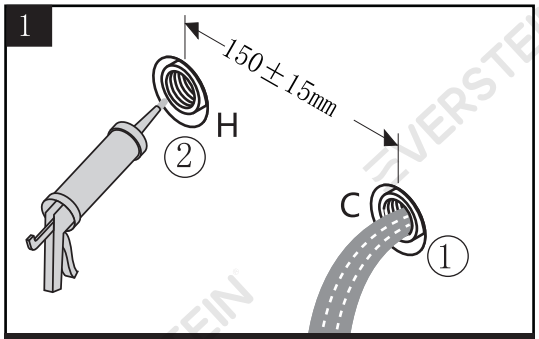


Abra el agua y enjuague la tubería de agua durante 3 minutos antes de la instalación. Enjuague la arena y la grava de la tubería de agua. Primero selle el espacio entre la salida de agua G1/2 y la pared con sellador de silicona. La distancia central entre las 2 salidas de agua debe estar entre 150±15mm.

2

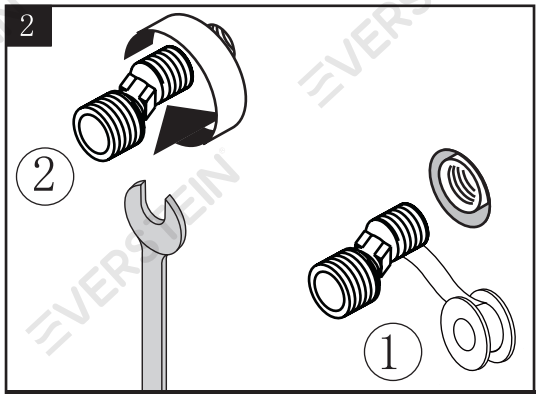


Primero envuelva la cinta de teflón en la rosca del codo giratorio. Luego, use una llave para atornillar los dos codos giratorios en las salidas de agua caliente y fría.

3

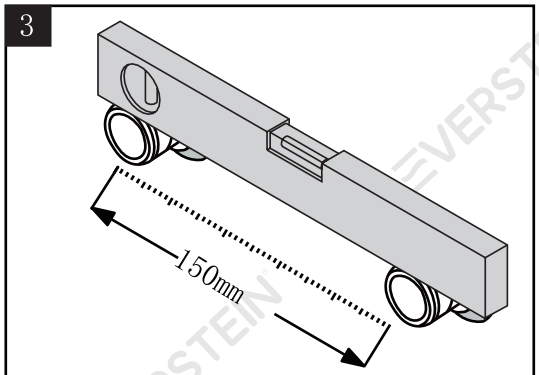


Ajuste los codos giratorios de modo que la distancia central entre los dos codos sea de 150 mm, y confirme que ambos estén al mismo nivel.

4

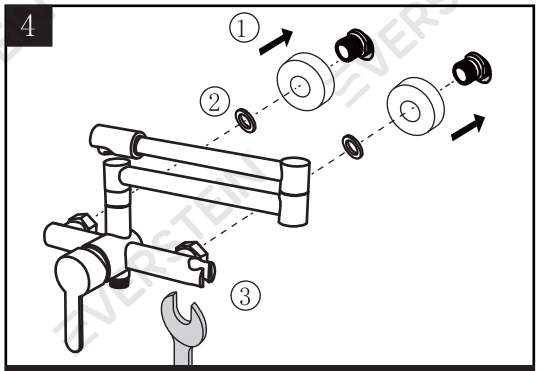


Como se muestra en la imagen, primero instale la cubierta decorativa en el codo giratorio y luego fije el grifo con una llave. Nota: No olvide el paso 2, colocar la arandela para evitar que la arena obstruya el grifo.

5

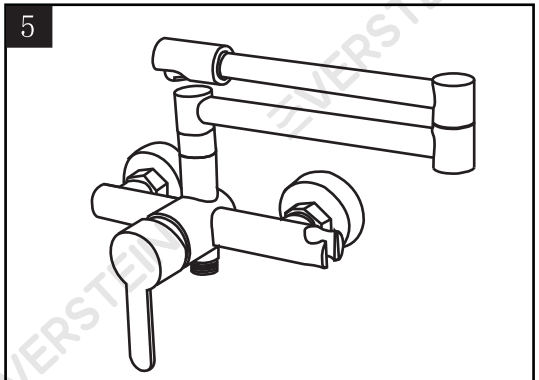


Después de instalar parcialmente el grifo, como se muestra en la imagen, empújelo hacia la pared cuando no esté en uso para ahorrar espacio en su cocina.

6

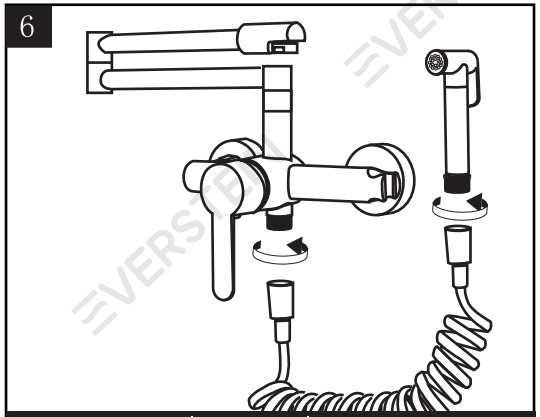


Como se muestra en la imagen, use la manguera para conectar el grifo y el rociador.

7

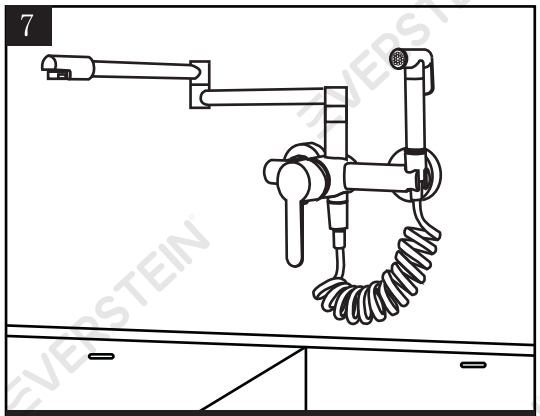


¡Instalación terminada! ¡Fácil de extraer al usar!

Dimensions / mm

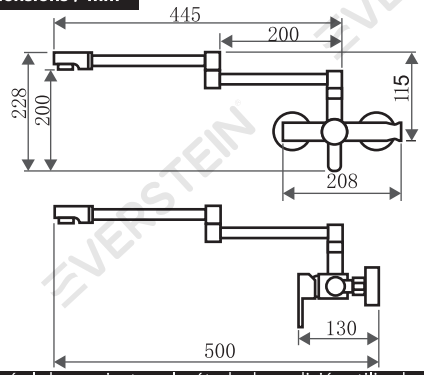


Según la herramienta y el método de medición utilizados, el tamaño puede tener un ligero error. ¡Por favor, refiérase al producto real!

Diseño Plegable De Rotación 360°

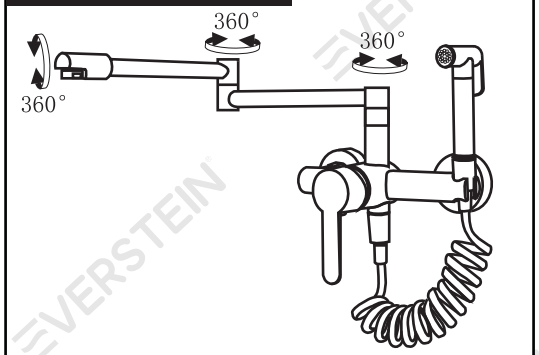


El diseño plegable de rotación de 360 grados ofrece la máxima comodidad y ahorra más espacio.


Adoptar una válvula de agua con cambio automático avanzado, logrando un diseño humanizado.

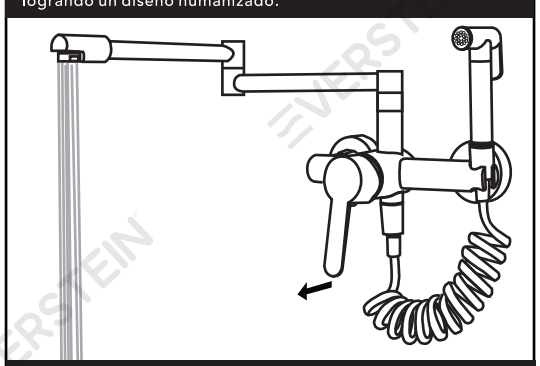

1. Primero, abra la manija principal; el agua saldrá por el grifo.

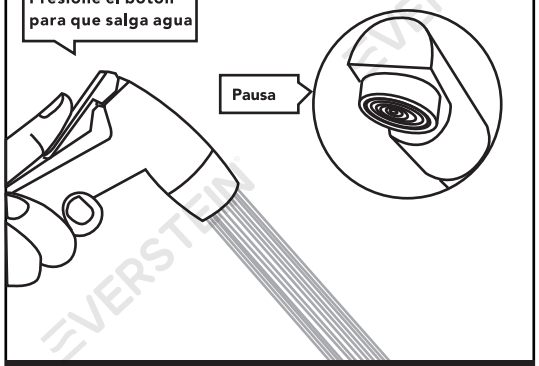

2. Presione el botón del rociador; el agua del grifo principal cambiará al rociador.

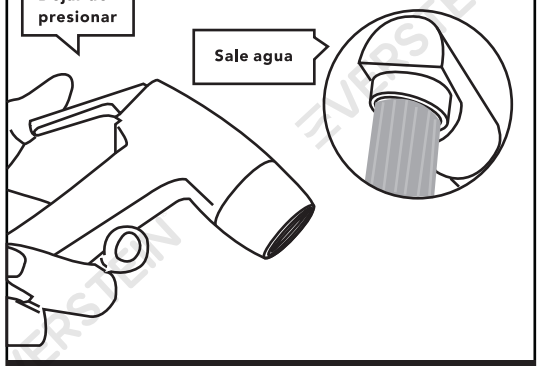

3. Al dejar de presionar el botón del rociador, el agua del grifo principal volverá a fluir.